






THE INFORMATION AND ILLUSTRATIONS CONTAINED IN THIS DRAWING ARE THE PROPERTY OF FOLIUMCEI. ANY UNAUTHORIZED REPRODUCTION IN WHOLE OR IN PART IS STRICTLY PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	3/1/2007	GS

COLOR BLACK UNLESS OTHERWISE NOTED




SERIES A USB PLUG P1

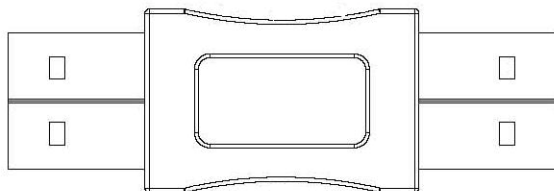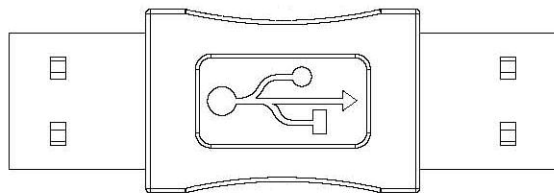

SERIES A USB PLUG P2

TABLE	
P1	P2
PIN 1	PIN 1
PIN 2	PIN 2
PIN 3	PIN 3
PIN 4	PIN 4
GRD	GRD

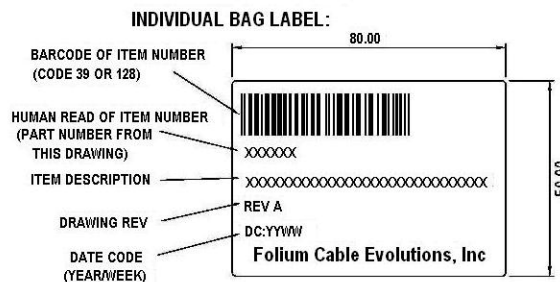

NOTES:
 OVMOLD: PVC
 CONTACTS: BRASS
 INSULATOR: PBT, UL 94V-0
 SHELL: NICKEL
 CONTACTS: GOLD PLATED NICKEL
 CURRENT: 3 AMP
 RESISTANCE: 1000 OHM/MIN @ 500VDC



UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. TOLERANCES ARE:
 .X ±.1
 .XX ±.05
 .XXX ±.005
 CABLE LENGTH TOLERANCE
 <300" ±5% >300" ±2%

APPROVALS	DATE
DRAWN BY SC	03/01/2007
CHECKED BY MH	03/01/2007
APPROVED BY GS	03/01/2007



ITEM DESCRIPTION		REV.
ADAPTER, USB TYPE A MALE / MALE		A
SIZE	ITEM NUMBER	
A	253500	
SCALE: NONE		SHEET 1 OF 1
CAD FILE: AUTHORIZED ACCESS ONLY		