


THE INFORMATION AND ILLUSTRATIONS CONTAINED IN THIS DRAWING ARE THE PROPERTY OF FOLIUMCEI. ANY UNAUTHORIZED REPRODUCTION IN WHOLE OR IN PART IS STRICTLY PROHIBITED.


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	3/1/2007	GS

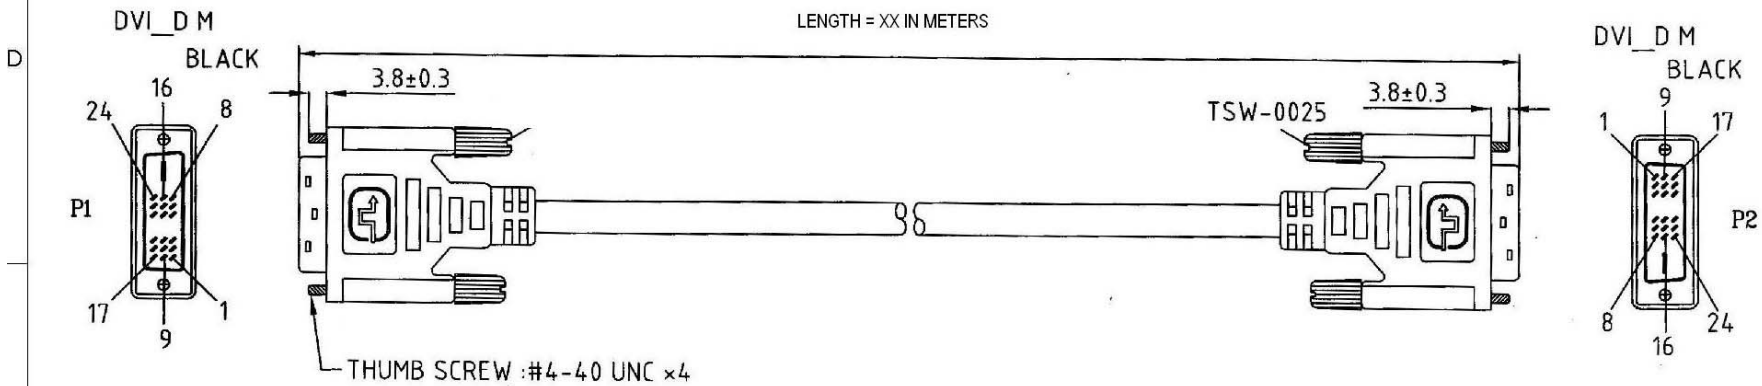

NOTE:

1. CABLE: UL20276 [28AWG(7/0.127)×1PAIR+DRAIN WIRE+AL/MYLAR+MYLAR]×4C +28AWG(7/0.127)×1PAIR+28AWG(7/0.127)×3C +AL/MYLAR +BRAID PVC JACKET OD:7.3±0.2mm COLOR:BLACK(NK-K01)
2. CONNECTOR: P1& P2: DVI 18+1 DIGITAL MALE CONTACT:G/F, NICKEL PLATED SHELL.
3. SHIELD: P1&P2 COPPER FOIL 360°SOLDERED TO CONNECTOR SHELL & CABLE BRAID
4. HOOD: MOLDED TYPE, PVC 45P, COLOR:BLACK(NK-K01)
5. TEST REQUEST:
 - (1) 100% OPEN SHORT & MIS WIRE TEST
 - (2) CONTACT RESISTANCE 3 OHM MAX
 - (3) INSULATION RESISTANCE 10M OHM MIN
 - (4) HI-POT VOLTAGE 300V DC/0.01SEC
6. PACKING: (1) EACH 1PC / POLYBAG +LABEL

P1	P2	COLOR
1	1	WHITE
2	2	RED
3	3	SHIELD
6	6	YELLOW
7	7	ORANGE
9	9	WHITE
10	10	GREEN
11	11	SHIELD
14	14	PURPLE
15	15	RED
16	16	WHITE
17	17	WHITE
18	18	BLUE
19	19	SHIELD
23	23	BROWN
24	24	WHITE
22	22	SHIELD
SHELL	SHELL	GROUND

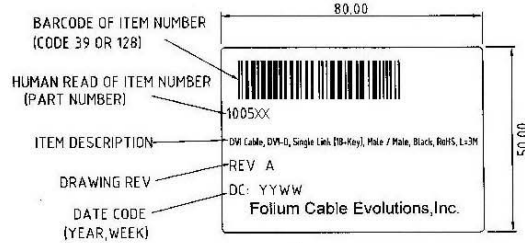

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. TOLERANCES ARE:
 .X ±.1
 .XX ±.05
 .XXX ±.005
 CABLE LENGTH TOLERANCE
 <300' ±5% >300' ±2%

APPROVALS	DATE
DRAWN BY SC	03/01/2007
CHECKED BY MH	03/01/2007
APPROVED BY GS	03/01/2007



ITEM DESCRIPTION
DVI CABLE, DVI-D, SINGLE-LINK (18+KEY), MALE/MALE

SIZE ITEM NUMBER 1005XX where "XX" = Length in Meters REV: **A**

SCALE: NONE CAD FILE: AUTHORIZED ACCESS ONLY SHEET 1 OF 1