


THE INFORMATION AND ILLUSTRATIONS CONTAINED IN THIS DRAWING ARE THE PROPERTY OF FOLIUMCEL. ANY UNAUTHORIZED REPRODUCTION IN WHOLE OR IN PART IS STRICTLY PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	3/1/2007	GS

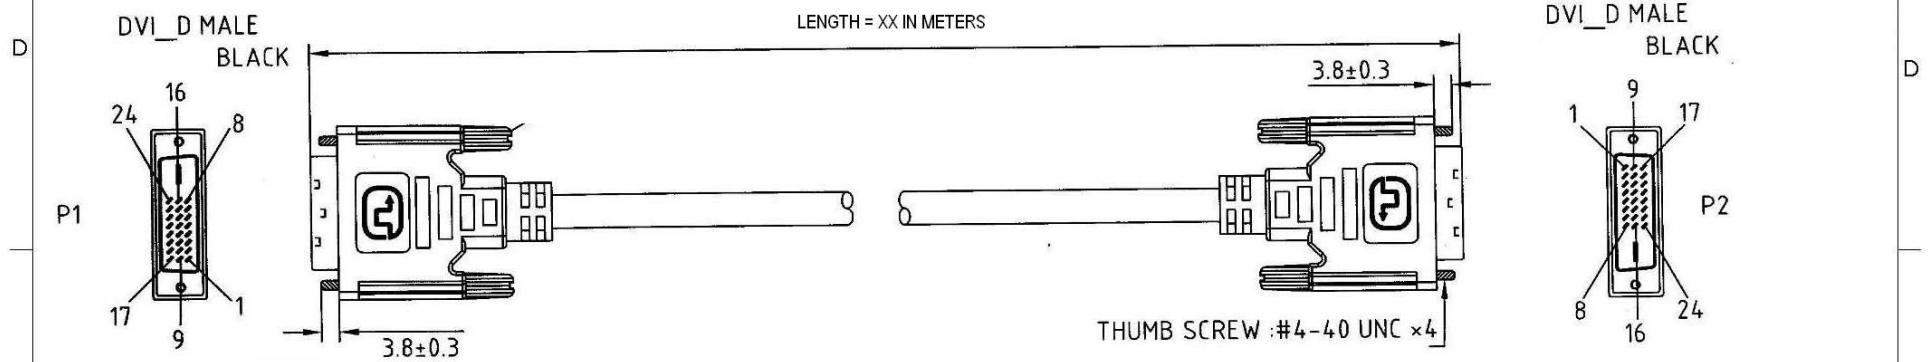

P1	WIRE COLOR	P2
1		1
2		2
3		3
4		4
5		5
6		6
7		7
9		9
10		10
11		11
12		12
13		13
14		14
15		15
16		16
17		17
18		18
19		19
19		19
20		20
21		21
22		22
23		23
24		24
SHELL	BRAID SHIELDS	SHELL

NOTE:

- CABLE: UL20276 [(28AWG(7/0.127)×1P+DRAIN WIRE+AL/MYLAR+MYLAR)×7C +28AWG(7/0.127)×1P+28AWG(7/0.127)×3C+AL/MY +BRAID SHIELDS]T.C
JACKET:PVC OD:8.6±0.15mm, COLOR:BLACK(NK-K01)
- CONNECTOR:
P1&P2: DVI 24+1 DIGITAL MALE CONTACT:G/F,SHELL: NICKEL PLATED.
- P1&P2 SHIELD:COPPER FOIL 360° SOLDER TO CONNECTOR SHELL & CABLE BRAID .
- HOOD:P1&P2:MOLDED TYPE,PVC 45P,COLOR:BLACK(NK-K01) .
- ELECTRICAL TEST:
(1) 100% OPEN SHORT & MIS WIRE TEST
(2) CONTACT RESISTANCE 3 OHM MAX
(3) INSULATION RESISTANCE 10M OHM MIN
(4) HI-POT VOLTAGE 300V DC/0.01SEC
- PACKING: (1)EACH PC / POLYBAG+LABEL

Barcode of item number (CODE 39 OR 128)

HUMAN READ OF ITEM NUMBER (PART NUMBER)

ITEM DESCRIPTION

DRAWING REV

DATE CODE (YEAR, WEEK)

80.00

50.00

1007XX

DVI Cable, DVI-D, Dual Link (24+Key), Male / Male, Black, RoHS, L=3M

REV A

DC: YYWW

Folium Cable Evolutions, Inc.



UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. TOLERANCES ARE:
 .X ±.1
 .XX ±.05
 .XXX ±.005
 CABLE LENGTH TOLERANCE
 <300' ±5% >300' ±2%

APPROVALS	DATE
DRAWN BY SC	03/01/2007
CHECKED BY MH	03/01/2007
APPROVED BY GS	03/01/2007



ITEM DESCRIPTION
DVI CABLE, DVI-D, DUAL LINK (24+KEY), MALE/MALE

SIZE A	ITEM NUMBER 1007XX where 'XX' = Length in Meters	REV. A
------------------	--	------------------

SCALE: NONE | CAD FILE: AUTHORIZED ACCESS ONLY | SHEET 1 OF 1