


THE INFORMATION AND ILLUSTRATIONS CONTAINED IN THIS DRAWING ARE THE PROPERTY OF FOLIUMCEI. ANY UNAUTHORIZED REPRODUCTION IN WHOLE OR IN PART IS STRICTLY PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	3/1/2007	GS

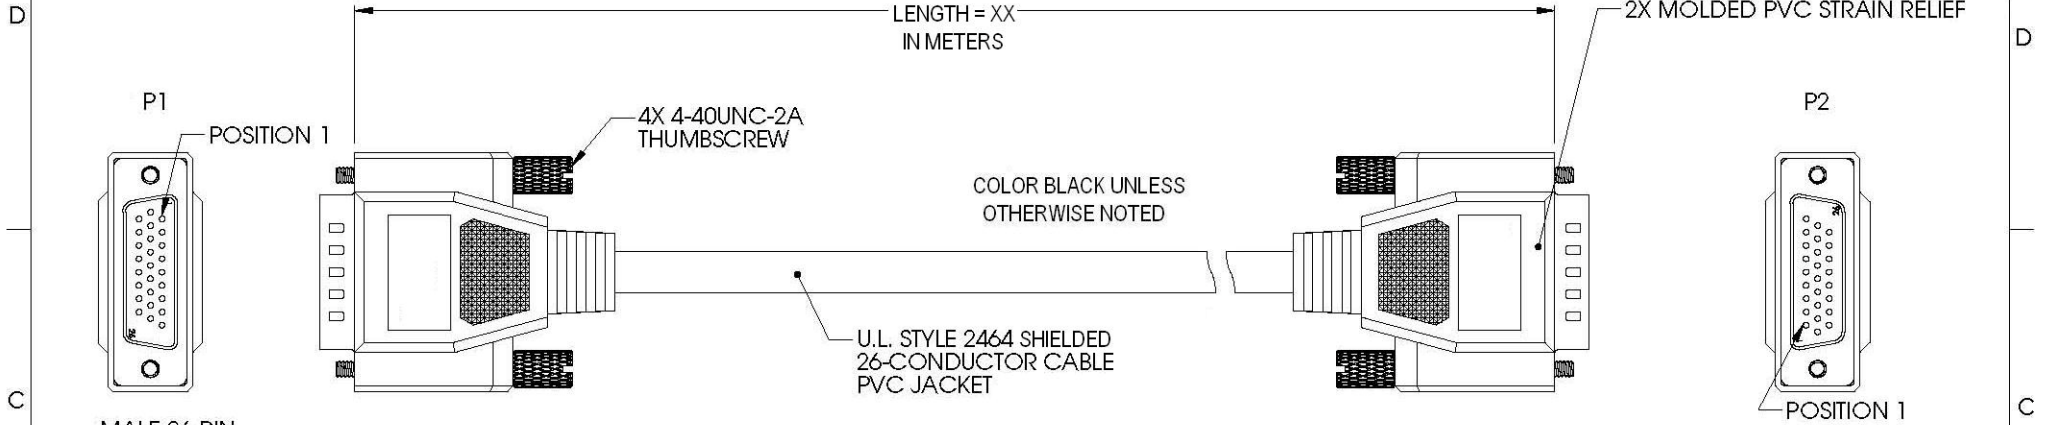


MALE 26 PIN HIGH DENSITY D-SUB CONNECTOR

MALE 26 PIN HIGH DENSITY D-SUB CONNECTOR

WIRING	
P1	P2
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12
13	13
14	14
15	15
16	16
17	17
18	18
19	19
20	20
21	21
22	22
23	23
24	24
25	25
26	26
SHELL	SHELL

- NOTES:
 1. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY
 2. EACH CABLE ASSEMBLY SHALL BE PACKAGED IN A POLY BAG

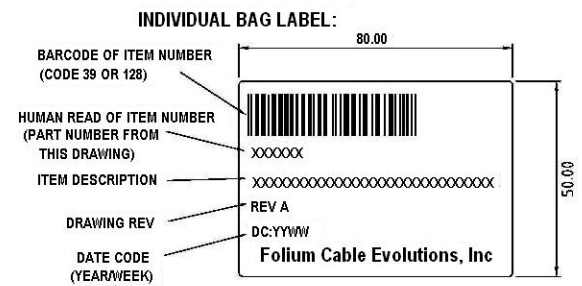

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. TOLERANCES ARE:
 .X ±.1
 .XX ±.05
 .XXX ±.005
 CABLE LENGTH TOLERANCE
 <300" ±5% >300" ±2%

APPROVALS	DATE
DRAWN BY SC	03/01/2007
CHECKED BY MH	03/01/2007
APPROVED BY GS	03/01/2007

ITEM DESCRIPTION
 D-SUB CABLE ASSY, HD26 MALE / MALE, MOLDED, SHIELDED

SIZE	ITEM NUMBER	REV.
A	2013XX where "XX" = Length in Meters	A

SCALE: NONE CAD FILE: AUTHORIZED ACCESS ONLY SHEET 1 OF 1