


THE INFORMATION AND ILLUSTRATIONS CONTAINED IN THIS DRAWING ARE THE PROPERTY OF FOLIUMCEI. ANY UNAUTHORIZED REPRODUCTION IN WHOLE OR IN PART IS STRICTLY PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	3/1/2007	GS

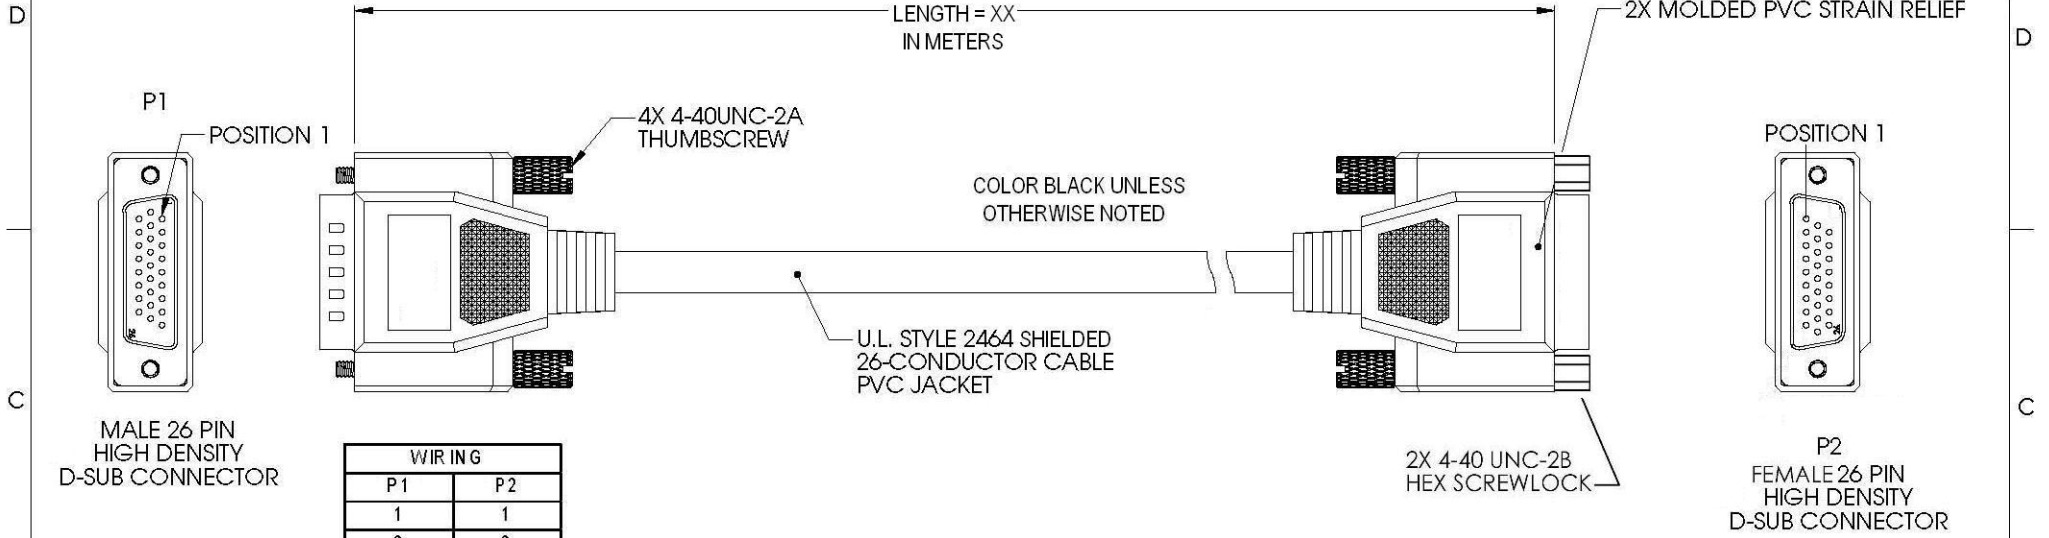


MALE 26 PIN HIGH DENSITY D-SUB CONNECTOR

WIRING	
P1	P2
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12
13	13
14	14
15	15
16	16
17	17
18	18
19	19
20	20
21	21
22	22
23	23
24	24
25	25
26	26
SHELL	SHELL

P2 FEMALE 26 PIN HIGH DENSITY D-SUB CONNECTOR

- NOTES:  
 1. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY  
 2. EACH CABLE ASSEMBLY SHALL BE PACKAGED IN A POLY BAG

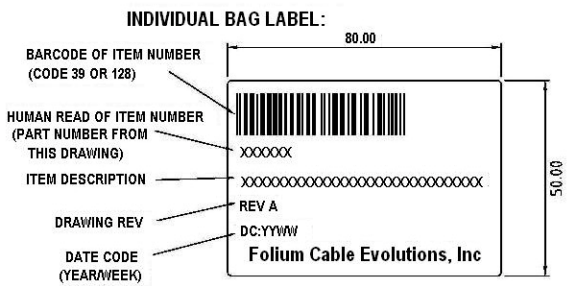

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. TOLERANCES ARE:  
 .X ±.1  
 .XX ±.05  
 .XXX ±.005  
 CABLE LENGTH TOLERANCE  
 <300" ±5% >300" ±2%

APPROVALS	DATE
DRAWN BY SC	03/01/2007
CHECKED BY MH	03/01/2007
APPROVED BY GS	03/01/2007



ITEM DESCRIPTION D-SUB CABLE ASSY, HD26 MALE / FEMALE, MOLDED, SHIELDED		
SIZE <b>A</b>	ITEM NUMBER 2014XX where "XX" = Length in Meters	REV. <b>A</b>
SCALE: NONE		CAD FILE: AUTHORIZED ACCESS ONLY
		SHEET 1 OF 1