



THE INFORMATION AND ILLUSTRATIONS CONTAINED IN THIS DRAWING ARE THE PROPERTY OF FOLIUMCEI. ANY UNAUTHORIZED REPRODUCTION IN WHOLE OR IN PART IS STRICTLY PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	3/1/2007	GS

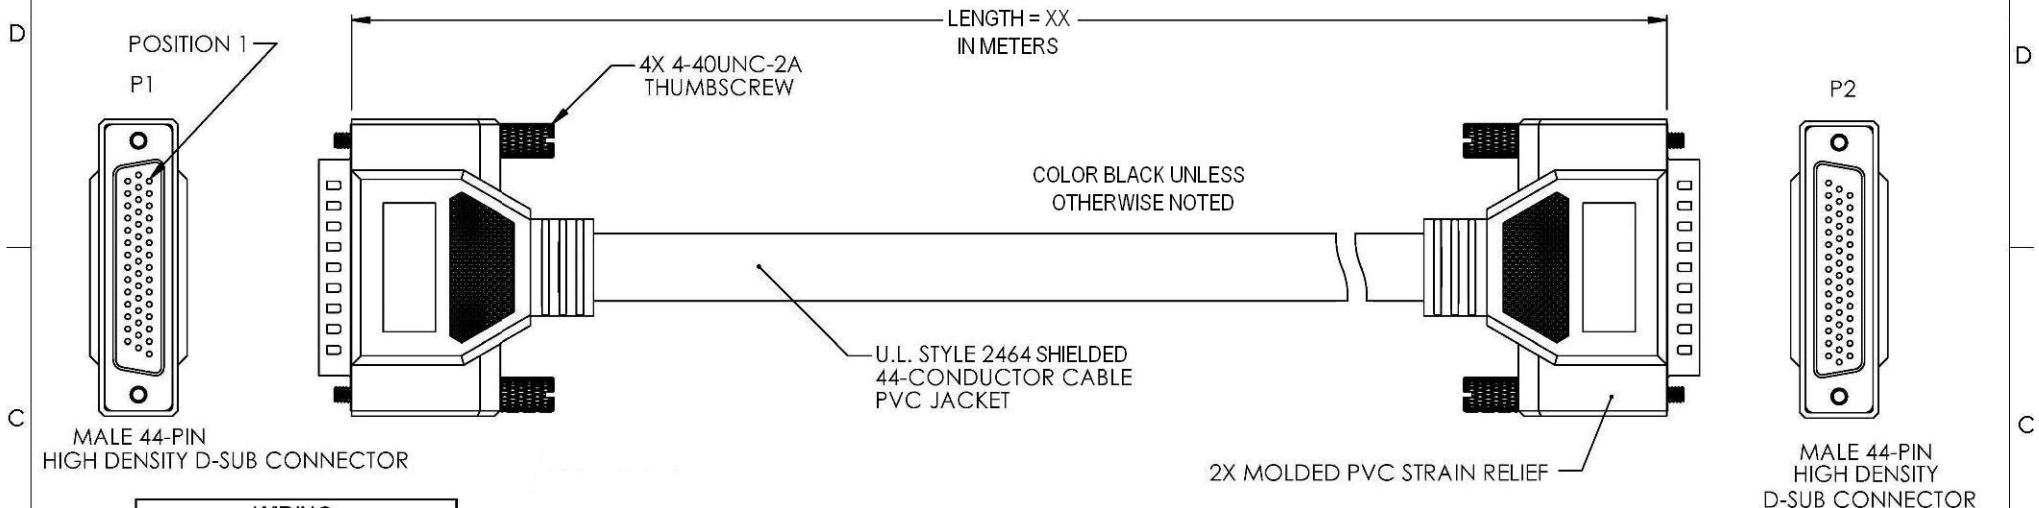

WIRING			
P1	P2	P1	P2
1	1	23	23
2	2	24	24
3	3	25	25
4	4	26	26
5	5	27	27
6	6	28	28
7	7	29	29
8	8	30	30
9	9	31	31
10	10	32	32
11	11	33	33
12	12	34	34
13	13	35	35
14	14	36	36
15	15	37	37
16	16	38	38
17	17	39	39
18	18	40	40
19	19	41	41
20	20	42	42
21	21	43	43
22	22	44	44
		SHELL	SHELL

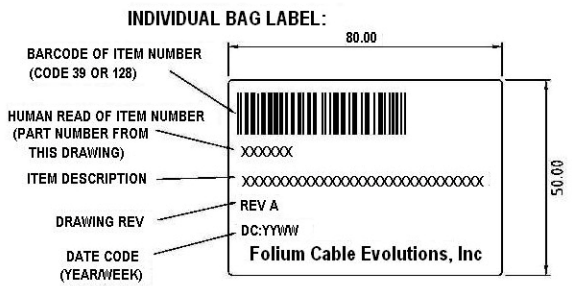

- NOTES:
- CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY
 - EACH CABLE ASSEMBLY SHALL BE PACKAGED IN A POLY BAG



UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. TOLERANCES ARE:
 .X ±.1
 .XX ±.05
 .XXX ±.005
 CABLE LENGTH TOLERANCE
 <300" ±5% >300" ±2%

APPROVALS	DATE
DRAWN BY SC	03/01/2007
CHECKED BY MH	03/01/2007
APPROVED BY GS	03/01/2007

FOLIUM CABLE EVOLUTIONS, INC.
 PLUG IN TO PERFECTION
 www.foliumcei.com

ITEM DESCRIPTION
 D-SUB CABLE ASSY, HD44 MALE / MALE, MOLDED, SHIELDED

SIZE	ITEM NUMBER	REV.
A	2015XX where "XX" = Length in Meters	A

SCALE: NONE CAD FILE: AUTHORIZED ACCESS ONLY SHEET 1 OF 1