


THE INFORMATION AND ILLUSTRATIONS CONTAINED IN THIS DRAWING ARE THE PROPERTY OF FOLIUMCEI. ANY UNAUTHORIZED REPRODUCTION IN WHOLE OR IN PART IS STRICTLY PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	3/1/2007	GS

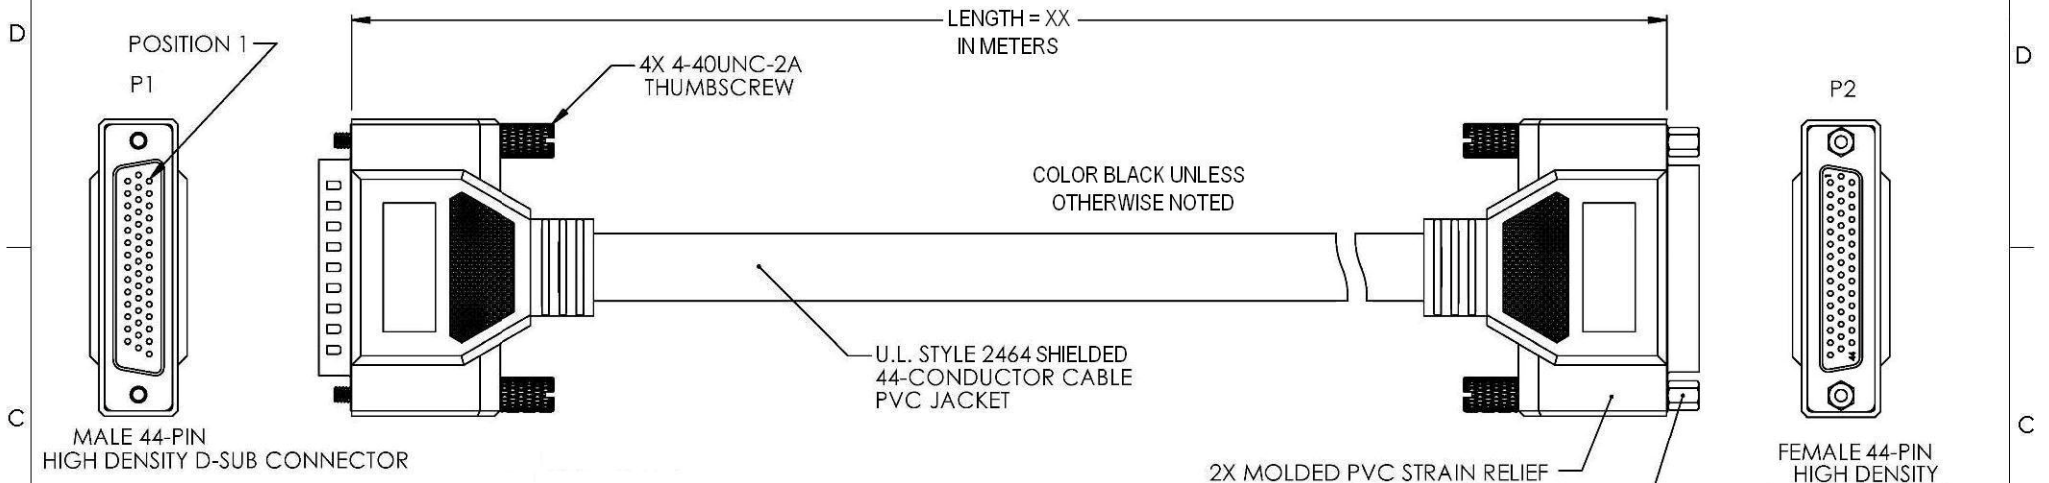


WIRING			
P1	P2	P1	P2
1	1	23	23
2	2	24	24
3	3	25	25
4	4	26	26
5	5	27	27
6	6	28	28
7	7	29	29
8	8	30	30
9	9	31	31
10	10	32	32
11	11	33	33
12	12	34	34
13	13	35	35
14	14	36	36
15	15	37	37
16	16	38	38
17	17	39	39
18	18	40	40
19	19	41	41
20	20	42	42
21	21	43	43
22	22	44	44
		SHELL	SHELL

- NOTES:
 1. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY
 2. EACH CABLE ASSEMBLY SHALL BE PACKAGED IN A POLY BAG



UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. TOLERANCES ARE:
 .X ±.1
 .XX ±.05
 .XXX ±.005
 CABLE LENGTH TOLERANCE
 <300" ±5% >300" ±2%

APPROVALS	DATE
DRAWN BY SC	03/01/2007
CHECKED BY MH	03/01/2007
APPROVED BY GS	03/01/2007

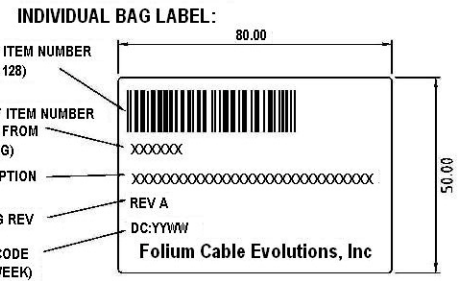

ITEM DESCRIPTION D-SUB CABLE ASSY, HD44 MALE / FEMALE, MOLDED, SHIELDED		
SIZE A	ITEM NUMBER 2016XX where "XX" = Length in Meters	REV. A
SCALE: NONE		CAD FILE: AUTHORIZED ACCESS ONLY
		SHEET 1 OF 1