


THE INFORMATION AND ILLUSTRATIONS CONTAINED IN THIS DRAWING ARE THE PROPERTY OF FOLIUMCEI. ANY UNAUTHORIZED REPRODUCTION IN WHOLE OR IN PART IS STRICTLY PROHIBITED.


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	3/1/2007	GS

D  
C  
B  
A


D  
C  
B  
A

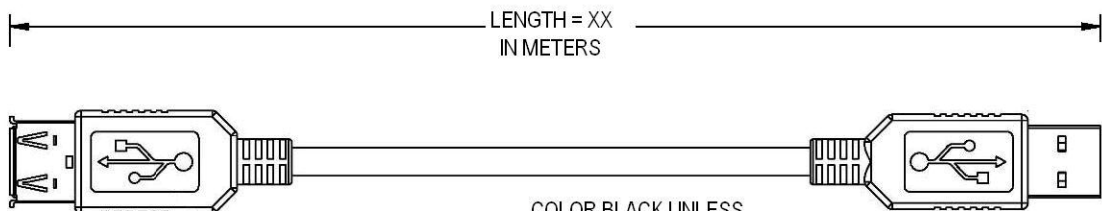



COLOR BLACK UNLESS OTHERWISE NOTED



SERIES A USB JACK




SERIES A USB PLUG




ONE 28AWG TWISTED PAIR (DATA) PLUS TWO POWER CONDUCTORS  
OVERALL POLYESTER SHIELD WITH DRAIN WIRE PLUS TINNED COPPER BRAID SHIELD.  
PVC OUTER JACKET

WIRING DIAGRAM

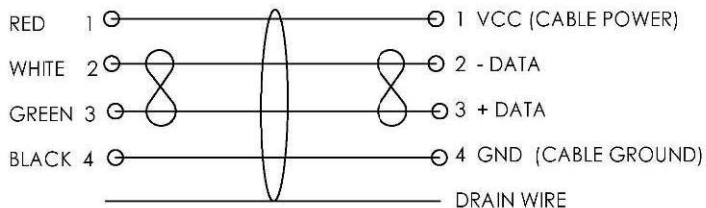

- NOTES;  
1. CABLE ASSEMBLIES MEET USB 2.0 SPECIFICATION.  
2. CONTACTS FINISH: 30 MICROINCHES GOLD PLATING OVER NICKEL PLATING.  
3. CABLE SHIELD DRAIN WIRE CONNECTED TO THE METAL SHELL OF EACH PLUG.

INDIVIDUAL BAG LABEL:

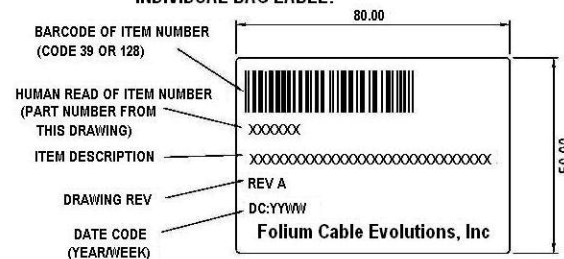

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. TOLERANCES ARE:  
.X ±.1  
.XX ±.05  
.XXX ±.005  
CABLE LENGTH TOLERANCE  
<300" ±5% >300" ±2%

APPROVALS	DATE
DRAWN BY SC	03/01/2007
CHECKED BY MH	03/01/2007
APPROVED BY GS	03/01/2007



ITEM DESCRIPTION USB CABLE ASSY, TYPE A MALE / FEMALE	
SIZE <b>A</b>	ITEM NUMBER 2520XX where "XX" = Length in Meters
SCALE: NONE	CAD FILE: AUTHORIZED ACCESS ONLY
SHEET 1 OF 1	

8 7 6 5 4 3 2 1