THE INFORMATION AND ILLUSTRATIONS CONTAINED IN THIS DRAWING ARE THE PROPERTY OF FOLIUMCEI. ANY UNAUTHORIZED REPRODUCTION IN WHOLE OR IN PART IS STRICTLY PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	3/1/2007	GS

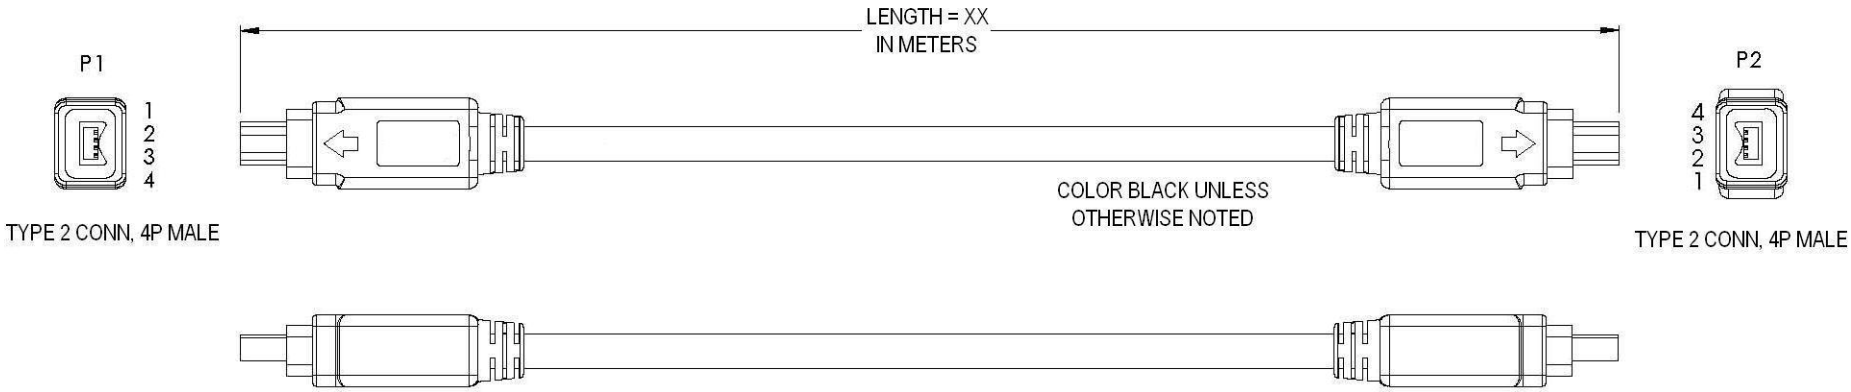

WIRING		
TYPE 1 CONNECTOR	TYPE 1 CONNECTOR	WIRE DESCRIPTION
PIN 1	PIN 3	SHIELDED TWISTED PAIR
PIN 2	PIN 4	
PIN 3	PIN 1	SHIELDED TWISTED PAIR
PIN 4	PIN 2	
SHELL	SHELL	OVERALL SHIELD

INDIVIDUAL BAG LABEL:

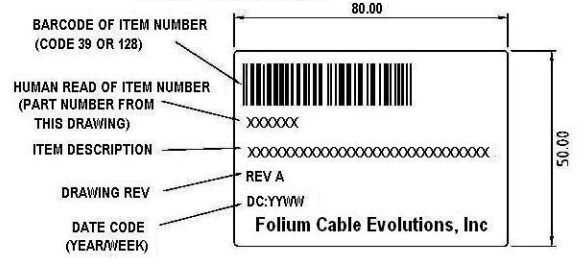

NOTES:
1. CABLE ASSEMBLIES CONSTRUCTED TO MEET THE REQUIREMENTS OF THE IEEE-1394 SPECIFICATION.
2. CONTACT FINISH 30µin GOLD (MINIMUM), OVER 50µin NICKEL (MINIMUM).
3. TWISTED PAIRS INDIVIDUALLY SHIELDED. SHIELDS TIED TOGETHER.
4. CABLE OVERALL SHIELD CONNECTED TO METAL SHELLS OF BOTH PLUGS. OVERALL SHIELD CONNECTED TO TWISTED PAIRS' SHIELDS.

Environmentally Friendly
RoHS Compliant 2002/95/EC

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
.X ±.1
.XX ±.05
.XXX ±.005
CABLE LENGTH TOLERANCE
<300" ±5% >300" ±2%

APPROVALS	DATE
DRAWN BY SC	03/01/2007
CHECKED BY MH	03/01/2007
APPROVED BY GS	03/01/2007

FOLIUM CABLE EVOLUTIONS, INC.
PLUG IN TO PERFECTION
© www.foliumcei.com

ITEM DESCRIPTION
IEEE-1394 CABLE ASSY, TYPE 2, 4P MALE / MALE

SIZE	ITEM NUMBER	REV.
A	3017XX where "XX" = Length in Meters	A

SCALE: NONE | CAD FILE: AUTHORIZED ACCESS ONLY | SHEET 1 OF 1