

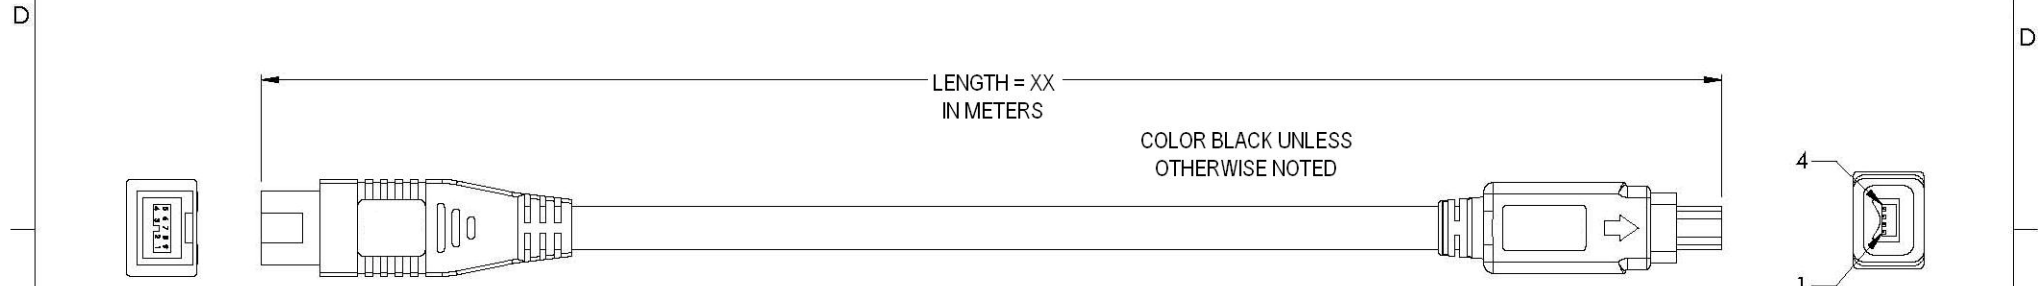


THE INFORMATION AND ILLUSTRATIONS CONTAINED IN THIS DRAWING ARE THE PROPERTY OF FOLIUMCEL. ANY UNAUTHORIZED REPRODUCTION IN WHOLE OR IN PART IS STRICTLY PROHIBITED.


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	3/1/2007	GS



P1  
1394b MALE BILINGUAL 9-PIN PLUG

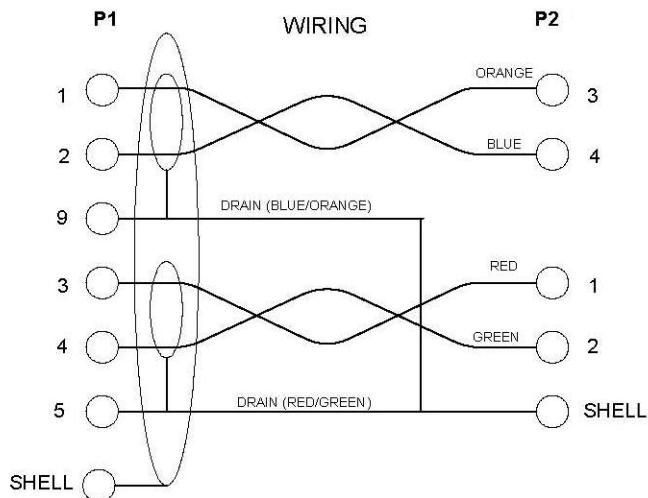

**INDIVIDUAL BAG LABEL:**

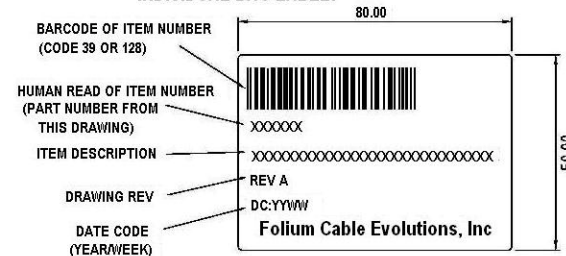

**SPECIFICATION:**

- CABLE ASSEMBLIES CONSTRUCTED TO MEET THE REQUIREMENTS OF THE IEEE-1394b SPECIFICATION.
- CONTACT FINISH 30µin GOLD (MINIMUM), OVER 50µin NICKEL (MINIMUM).
- CABLE U.L. STYLE 20276;  
TWO 26 AWG TWISTED PAIR, INDIVIDUALLY SHIELDED (CU-PT AND TRANSPARENT MYLAR SPIRALLY WRAPPED) WITH TINNED COPPER DRAIN WIRE.  
TWO 22 AWG STRANDED CONDUCTORS, ALUMINUM AND TRANSPARENT MYLAR OVERALL SHEILDING. OUTER JACKET; BLACK PVC



UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. TOLERANCES ARE:  
.X ±.1  
.XX ±.05  
.XXX ±.005  
CABLE LENGTH TOLERANCE  
<300" ±5% >300" ±2%

APPROVALS	DATE
DRAWN BY: SC	03/01/2007
CHECKED BY: MH	03/01/2007
APPROVED BY: GS	03/01/2007

**FOLIUM CABLE EVOLUTIONS, INC.**  
PLUG IN TO PERFECTION  
www.foliumcel.com

ITEM DESCRIPTION  
IEEE-1394 CABLE ASSY, TYPE 2 4-POS MALE TO TYPE B BILINGUAL 9-POS MALE

SIZE <b>A</b>	ITEM NUMBER 3041XX where "XX" = Length in Meters	REV. <b>A</b>
---------------	--	---------------

SCALE: NONE | CAD FILE: AUTHORIZED ACCESS ONLY | SHEET 1 OF 1