



THE INFORMATION AND ILLUSTRATIONS CONTAINED IN THIS DRAWING ARE THE PROPERTY OF FOLIUMCEI. ANY UNAUTHORIZED REPRODUCTION IN WHOLE OR IN PART IS STRICTLY PROHIBITED.


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	3/1/2007	GS

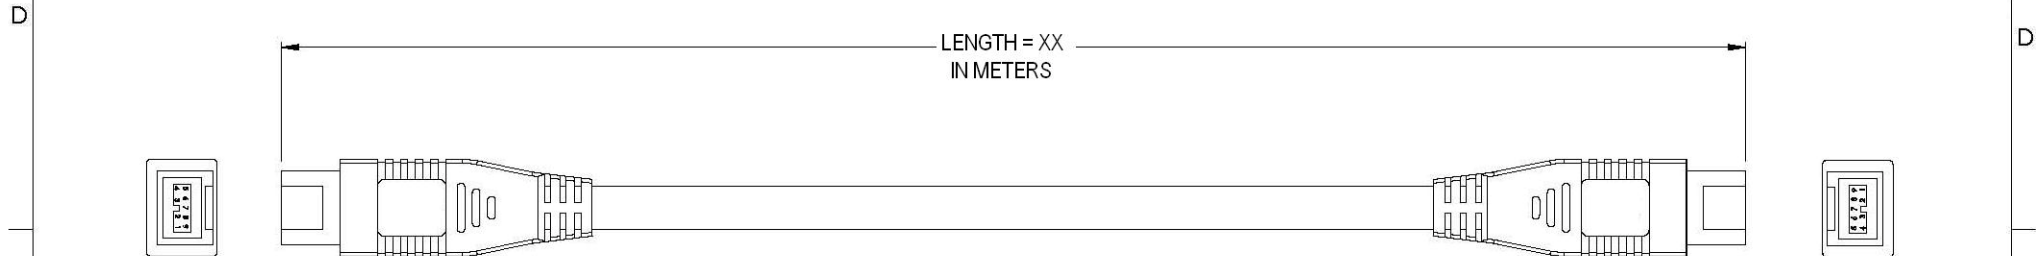

P1
IEEE-1394b TYPE B 9-POS
BILINGUAL MALE CONN

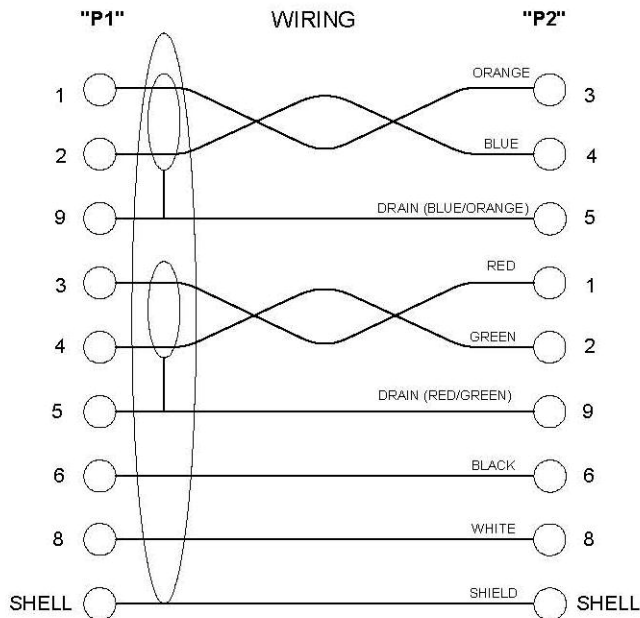

P2
IEEE-1394b TYPE B 9-POS
BILINGUAL MALE CONN

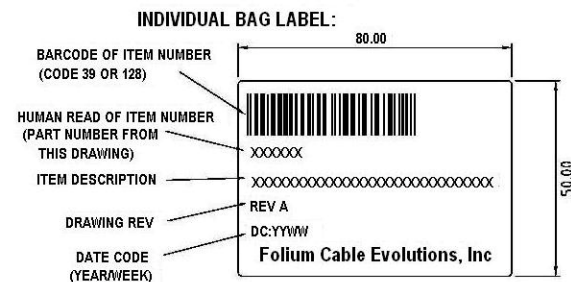

SPECIFICATION:

- CABLE ASSEMBLIES CONSTRUCTED TO MEET THE REQUIREMENTS OF THE IEEE-1394b SPECIFICATION.
- CONTACT FINISH 30µin GOLD (MINIMUM), OVER 50µin NICKEL (MINIMUM).
- CABLE U.L. STYLE 20276:
TWO 26 AWG TWISTED PAIR, INDIVIDUALLY SHIELDED (CU-PT AND TRANSPARENT MYLAR SPIRALLY WRAPPED) WITH TINNED COPPER DRAIN WIRE.
TWO 22 AWG STRANDED CONDUCTORS.
ALUMINUM AND TRANSPARENT MYLAR OVERALL SHIELDING.
OUTER JACKET; BLACK PVC



UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. TOLERANCES ARE:
.X ±.1
.XX ±.05
.XXX ±.005
CABLE LENGTH TOLERANCE
<300" ±5% >300" ±2%

APPROVALS	DATE
DRAWN BY SC	03/01/2007
CHECKED BY MH	03/01/2007
APPROVED BY GS	03/01/2007



ITEM DESCRIPTION
IEEE-1394b CABLE ASSY, TYPE B BILINGUAL
9-POSITION MALE / MALE

SIZE **A** ITEM NUMBER 3049XX where "XX" = Length in Meters REV. **A**

SCALE: NONE CAD FILE: AUTHORIZED ACCESS ONLY SHEET 1 OF 1